


Overview

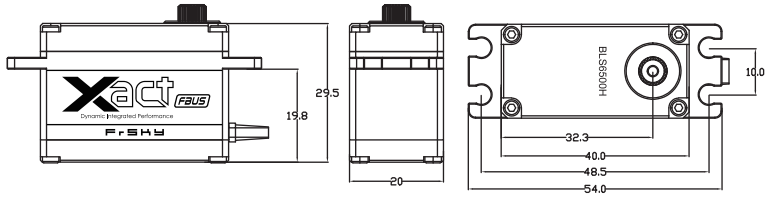

Specifications

- Dimension: 40×20×29.5mm
- Weight: 72.3g
- Horn Spline: Φ6 25T
- Operating Voltage: 4.8V-8.4V
- Refresh Rate: 1520us/333Hz | 760us/700Hz

PERFORMANCE	TORQUE SPEED @6.0V		TORQUE SPEED @7.4V		TORQUE SPEED @8.4V	
BLS6501H	27.0 kgf.cm 375.0 Oz-in	0.05 sec/60°	30.0 kgf.cm 416.6 Oz-in	0.04 sec/60°	33.0 kgf.cm 458.3 Oz-in	0.03 sec/60°
BLS6503H	48 kgf.cm 666.6 Oz-in	0.12 sec/60°	59 kgf.cm 819.4 Oz-in	0.09 sec/60°	66 kgf.cm 916.6 Oz-in	0.08 sec/60°
BLS6505H	56 kgf.cm 777.7 Oz-in	0.18 sec/60°	67 kgf.cm 930.5 Oz-in	0.15 sec/60°	74 kgf.cm 1027.7 Oz-in	0.13 sec/60°